


USED

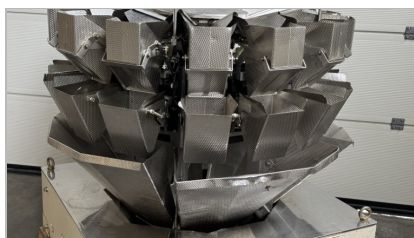

FILLING AND WEIGHING LINE "ISHIDA - ROVEMA"

Consisting of:

"Ishida" Multihead weigher

Type CCW-EZ-214/30

+

Vertical flowpackaging line "Rovema"

Type VPK260 - 14961

- yoc 2005
- Performance (mech.) Cycles/min: 180
- Roll width / diameter (max.) (mm): 450 / 550 (600 / 550 with pre-unrolling)
- Bag width (min. - max.) (mm): 60-260
- Bag length (min. - max.) (mm): 120-600
- Fill volume (max.) (cm³): 6000
- Sealing pressure (max.) (N): 5000 (optional: 8000)
- Program memory: Standard: 100 (optional: 1000)
- Dimensions: (L x W x H) (mm): 2.200 x 1.430 x 1.620 mm
- Weight: 920 kg
- Power supply (volts): 230 / 400
- Energy requirement (kVA): 8
- Protection class: IP54
- Compressed air connection: 6 bar
- Air consumption 6 bar (NI/cycle): 0.25
- Machine color: Ral 9007L / gray aluminum
- Operating temperature (min. - max.) (°C): +5 ... + 45
- Storage temperature (min. - max.) (°C): -20 ... +50
- Air humidity (max.) (%): 15...95; no condensation

"Ishida" Multihead weigher

Type CCW-EZ-214/30

+

Vertical flowpackaging line "Rovema"

Type VPK260 - 14960

- yoc 2005
- Performance (mech.) Cycles/min: 180
- Roll width / diameter (max.) (mm): 450 / 550 (600 / 550 with pre-unrolling)
- Bag width (min. - max.) (mm): 60-260
- Bag length (min. - max.) (mm): 120-600
- Fill volume (max.) (cm³): 6000
- Sealing pressure (max.) (N): 5000 (optional: 8000)
- Program memory: Standard: 100 (optional: 1000)
- Dimensions: (L x W x H) (mm): 2.200 x 1.430 x 1.620 mm

- Weight: 920 kg
- Power supply (volts): 230 / 400
- Energy requirement (kVA): 8
- Protection class: IP54
- Compressed air connection: 6 bar
- Air consumption 6 bar (NI/cycle): 0.25
- Machine color: Ral 9007L / gray aluminum
- Operating temperature (min. – max.) (°C): +5 ... + 45
- Storage temperature (min. – max.) (°C): -20 ... +50
- Air humidity (max.) (%): 15...95; no condensation

Interested? Contact us!

phone: +32 56 77 33 50 - email: info@barsso.com